


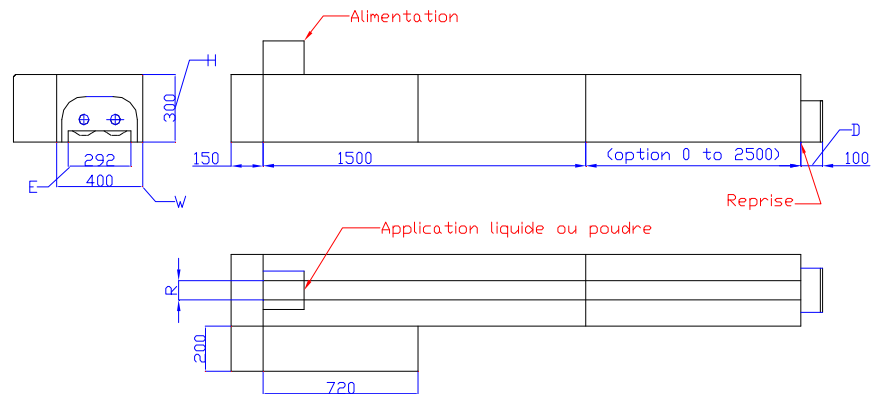




# Biturbine *un système d'enrobage à double vis*



| Modèle        | Ø vis | Débit volumétrique | H   | W   | E   | R   | D   |
|---------------|-------|--------------------|-----|-----|-----|-----|-----|
|               | mm    | L/h                | mm  | mm  | mm  | Mm  | mm  |
| <b>TB 100</b> | 100   | 1000               | 200 | 320 | 192 | 80  | 100 |
| <b>TB 150</b> | 150   | 3500               | 240 | 400 | 292 | 130 | 100 |
| <b>TB 200</b> | 200   | 8000               | 300 | 500 | 392 | 170 | 200 |
| <b>TB 250</b> | 250   | 16500              | 340 | 600 | 492 | 200 | 260 |
| <b>TB 300</b> | 300   | 28500              | 400 | 700 | 592 | 250 | 260 |

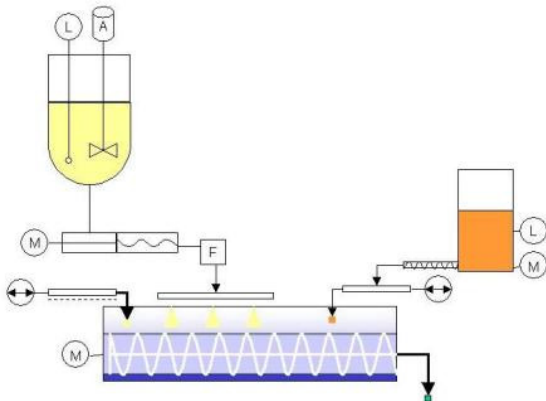

**Transitube SA**  
 86-108 Avenue Louis Roche  
 F-92230 Gennevilliers  
 France

Tel : +33 (0) 1 40 85 17 00  
 Fax : +33 (0) 1 40 85 04 11  
[www.biturbine.com](http://www.biturbine.com)  
[biturbine@biturbine.com](mailto:biturbine@biturbine.com)